

123008-DX4
S.A.E. HOUSING MOUNT 27/64 DIA DRILL THRU
12 HOLES EQUALLY SPACED ON 16.88 B.C.
5" PUMP PILOT S.A.E. "C" PUMP MOUNT
(4) 1/2-13 TAPPED HOLES EQUALLY SPACED
ON 6.38 B.C.

123243-49
13.874 O.D.
(8) .406 HOLES
ON 13.125 B.C.

PUMP
OR
MOTOR


2.44 SHAFT LENGTH

123196-31
SPLINE DATA
17 TEETH
12/24 D.P.
30° P.A.
1.533 MAJOR
SAE "C-C"

1.56
BACKSET

SAE #11-1/2
FLYWHEEL

SAE #3 HOUSING

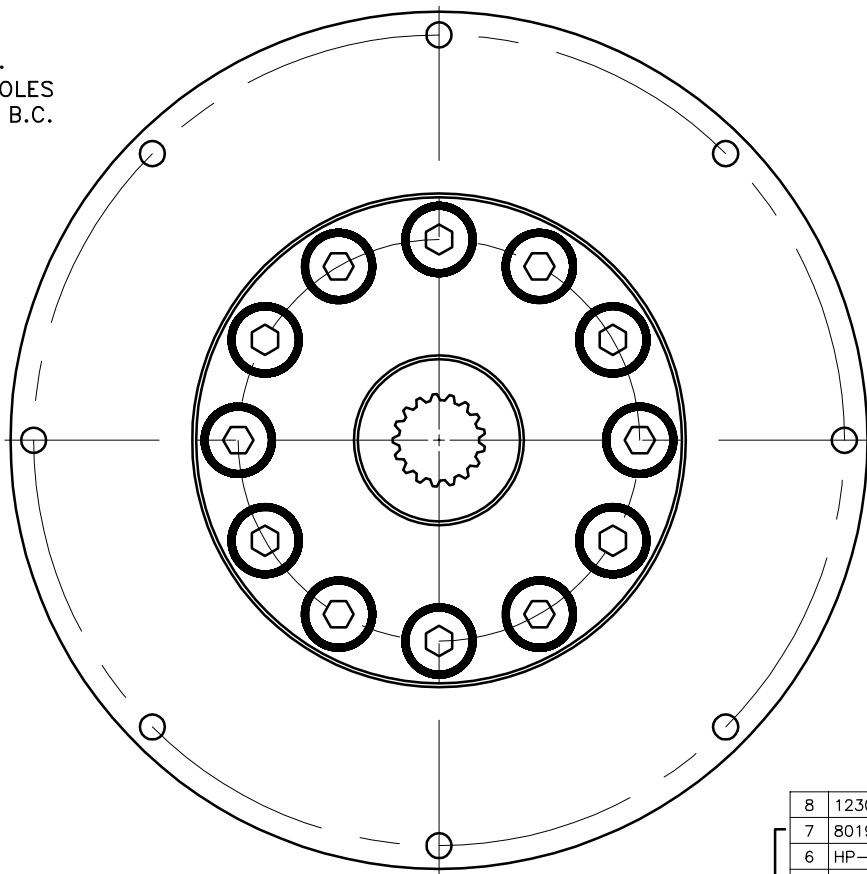

COUPLING ASS'Y
#124622

REV. NO.	SYM.	DATE	CHANGE DESCRIPTION	DWN.
	A	12/97	CHANGED .3906 TO .406	RH
000051	B	1/99	CHANGED SAE DESCRIPTION	RH
000138	C	12/00	CHANGED 123008-DQ4 TO DX4	RH

UP TO 350 HP

8	123008-DX4	PUMP MOUNT PLATE	1
7	801912	GREASE	1
6	HP-1625-S-62	HUBBARD PLUG	12
5	123727	THREADED BUSHING	12
4	HX200	7/16-20x1 HHB	12
3	H62500	NEOPRENE INSERT	12
2	123196-31	COUPLING HUB	1
1	123243-49	FLYWHEEL PLATE	1

SYMBOLS	DET.	PART NUMBER	DESCRIPTION	QTY.
FLATNESS STRAIGHTNESS ANGULARITY SQUARENESS PARALLELISM CONCENTRICITY TRUE POSITION ROUNDNESS CIRCULAR RUN OUT TOTAL RUN OUT CYLINDRICITY FINISH	DO NOT SCALE DRAWING		 TITLE FLYWHEEL COUPLING ASS'Y WITH PUMP MOUNT PLATE MATERIAL	
- UNLESS OTHERWISE SPECIFIED - REMOVE FIRST THREAD ON ALL TAPPED HOLES BREAK ALL SHARP CORNERS .010 TO .020 STAMP OR MARK DRAWING NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED ANGLE ±1/2° FRACTION ±1/32 DECIMAL .00 ±.01 .000 ±.005 .0000 ±.0005			
	DRAWN BY	DATE	DRAWING NO.	
	HAVEMAN	1-8-97	124621	
	CHECKED BY	SCALE	SHEET OF REV.	

THIS DRAWING IS THE PROPERTY OF HAYES MFG. INC. AND IS LOANED SUBJECT TO THE CONDITION THAT IT SHALL NOT BE REPRODUCED, COPIED, LOANED OR OTHERWISE DISPOSED OF, DIRECTLY OR INDIRECTLY. IT SHALL BE USED AS A MEANS OF REFERENCE TO WORK FURNISHED BY THIS COMPANY ONLY AND IS NOT TO BE SUBMITTED TO OUTSIDE PARTIES FOR EXAMINATION WITHOUT OUR CONSENT.