


REV	DATE	CHANGE DESCRIPTION	MOD. BY	CK1	CK2
H	04/11/2005	CHANGED (2) TO (3) PLUGS.	ZS	RJH	HM

PT# 126293-01
 S.A.E. HOUSING MOUNT 27/64 DRILL THRU
 12 HOLES EQUALLY SPACED ON 15.00 B.C.
 5" PUMP PILOT S.A.E. "C" PUMP MOUNT.
 (6) 1/2-13 TAPPED HOLES EQUALLY
 SPACED ON 6.375 B.C.

ATTENTION!!!

1. LIGHTLY GREASE INTERNAL AND EXTERNAL AREA OF SPLINE AT ASSEMBLY USING COUPLING GREASE (OVER GREASING COULD CAUSE A HYDRAULIC TYPE LIFT ON SEALS).
2. THE BEARING HOUSING IS SHIPPED WITH 9 OZ. OF MOBILE 1 5W/30.
3. OIL MUST BE CHANGED EVERY 800-1000 HOURS OR EACH MONTH WHICH EVER COMES FIRST. RECORDS MUST BE KEPT ON OIL CHANGES OR WARRANTY WILL BE VOID.
4. **WARNING!!!** INJURY OR DEATH FROM A ROTATING STUB SHAFT CAN OCCUR IF A CONDITION EXISTS WHICH WOULD CAUSE THE SHAFT TO BREAK OR COME APART FROM ANY PART OF THE ASSEMBLY. DEPENDING UPON THE APPLICATION (FOR EXAMPLE, FAN, PULLEY, SHEAVE, ETC.), THE AREA AROUND THE STUB SHAFT MUST BE SUFFICIENTLY GUARDED SO THAT IN THE EVENT OF FAILURE, THE GUARD WILL CONTAIN ANY AIRBORNE PARTS.

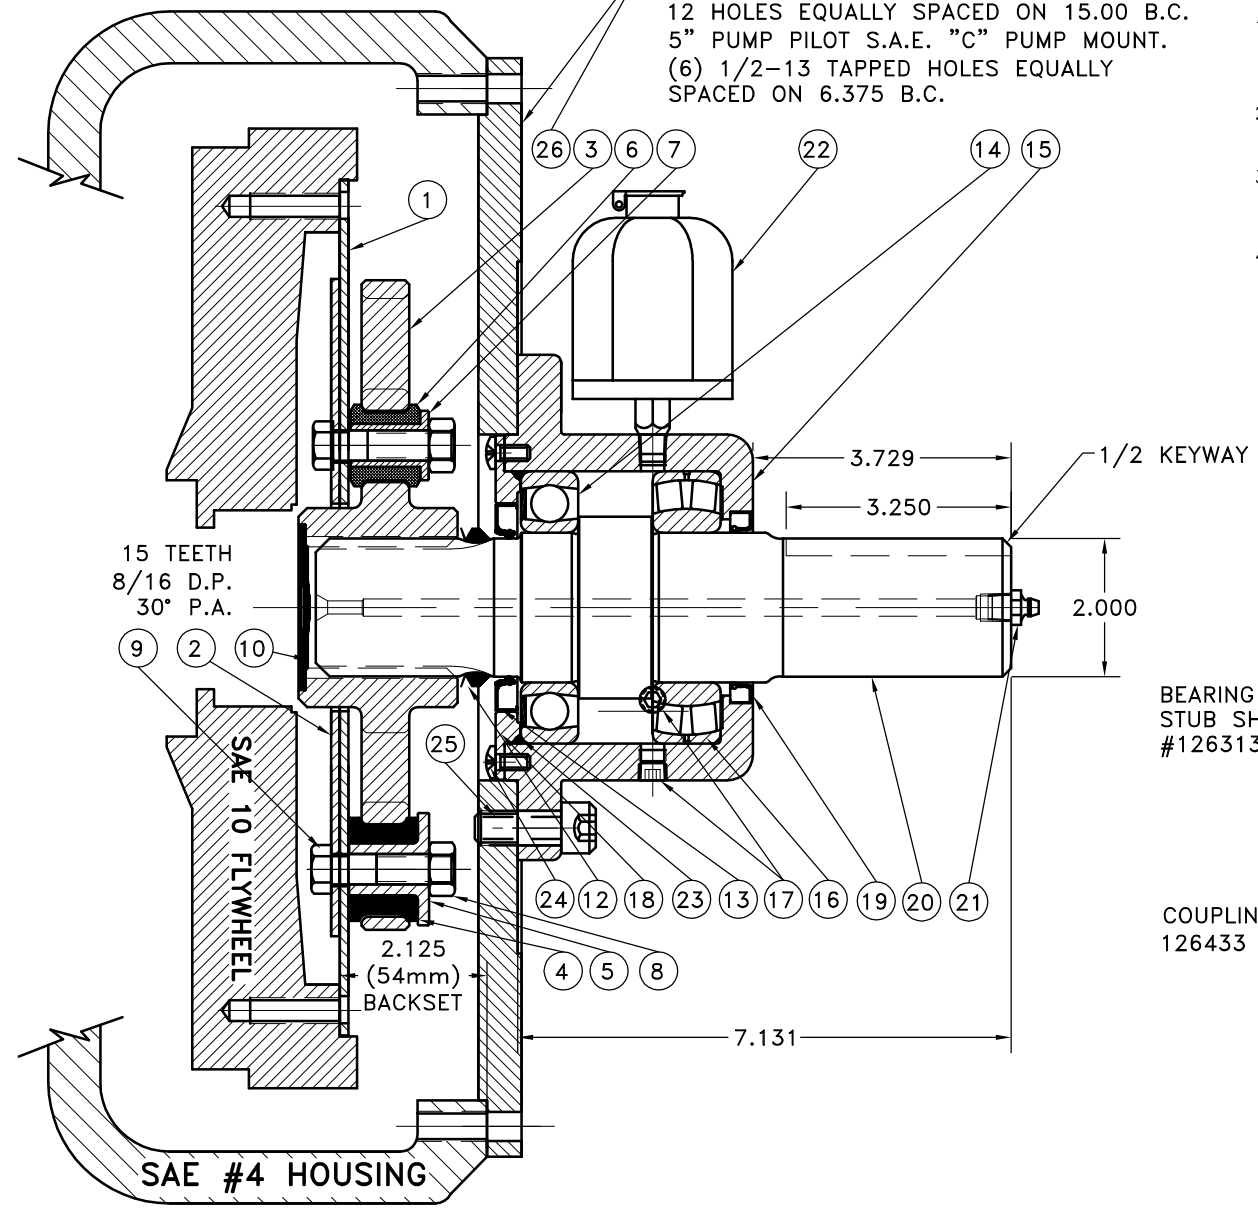

BEARING SUPPORTED
 STUB SHAFT SUB-ASS'Y
 #126313

COUPLING ASS'Y
 126433

26	126293-01	PUMP MOUNT PLATE	1
25	PURCHASE	1/2-13-1-1/4 SHCS	6
24	PURCHASE	1/4-20 x 1/2" BUTTON HEAD	6
23	568-154	O-RING	1
22	31141	OIL RESERVOIR	1
21	600000	GREASE ZERT	1
20	126312	SPLINED SHAFT	1
19	CRW1-R-21610	SEAL	1
18	126645	REAR SEAL ADAPTER	1
17	1/8-27	DRAIN/OVERFLOW PLUG	3
16	22211E	SPHERICAL ROLLER BEARING	1
15	126197	BEARING HOUSING	1
14	211NP	BEARING	1
13	CR 19992	SEAL	1
12	CR-400501	V-RING SEAL	1
11	801912	GREASE	2
10	R-0017-03	GREASE PLUG	1
9	HX230	7/16-20-1-3/4 BOLT	18
8	N250	7/16-20 NUT	18
7	123000-00	STEEL BUSHING	6
6	H62500	NEOPRENE INSERT	6
5	123706-02	STEEL BUSHING	12
4	H92500	NEOPRENE INSERT	12
3	126404	COUPLING HUB	1
2	126406	BACKING PLATE	1
1	126405	FLYWHEEL PLATE	1

THIS DRAWING IS THE PROPERTY OF HAYES MFG. INC. AND IS LOANED SUBJECT TO THE CONDITION THAT IT SHALL NOT BE REPRODUCED, COPIED, LOANED OR OTHERWISE DISPOSED OF, DIRECTLY OR INDIRECTLY. IT SHALL BE USED AS A MEANS OF REFERENCE TO WORK FURNISHED BY THIS COMPANY ONLY AND IS NOT TO BE SUBMITTED TO OUTSIDE PARTIES FOR EXAMINATION WITHOUT OUR CONSENT.

SYMBOLS	DET.	PART NUMBER	DESCRIPTION	QTY.
▨ FLATNESS ▩ STRAIGHTNESS ∠ ANGULARITY ⊥ PERPENDICULARITY ∥ PARALLELISM ⊙ CONCENTRICITY ⊕ TRUE POSITION ○ ROUNDNESS ⊖ CIRCULAR RUN OUT ⊖ TOTAL RUN OUT ⊖ CYLINDRICITY √ FINISH	DO NOT SCALE DRAWING TOLERANCES UNLESS OTHERWISE SPECIFIED 125 MAXIMUM ANGLE ±1/2° FRACTION ±1/32 DECIMAL .00 ±.01 .000 ±.005 .0000 ±.0005			
CLASS: MAKE: <input type="checkbox"/> BUY: <input type="checkbox"/>		TITLE: BEARING SUPPORTED STUB SHAFT ASS'Y MATERIAL:		
DESCRIPTION:		DRAWN BY: MAYCROFT CHECKED BY: RJH	DATE: 08-22-01 SCALE:	DRAWING NO.: 126432 SHEET OF REV.