


REV	DATE	CHANGE DESCRIPTION	MOD.BY	CK1	CK2
C	06/09/2016	CHANGED SEAL	BSL	HM	JM

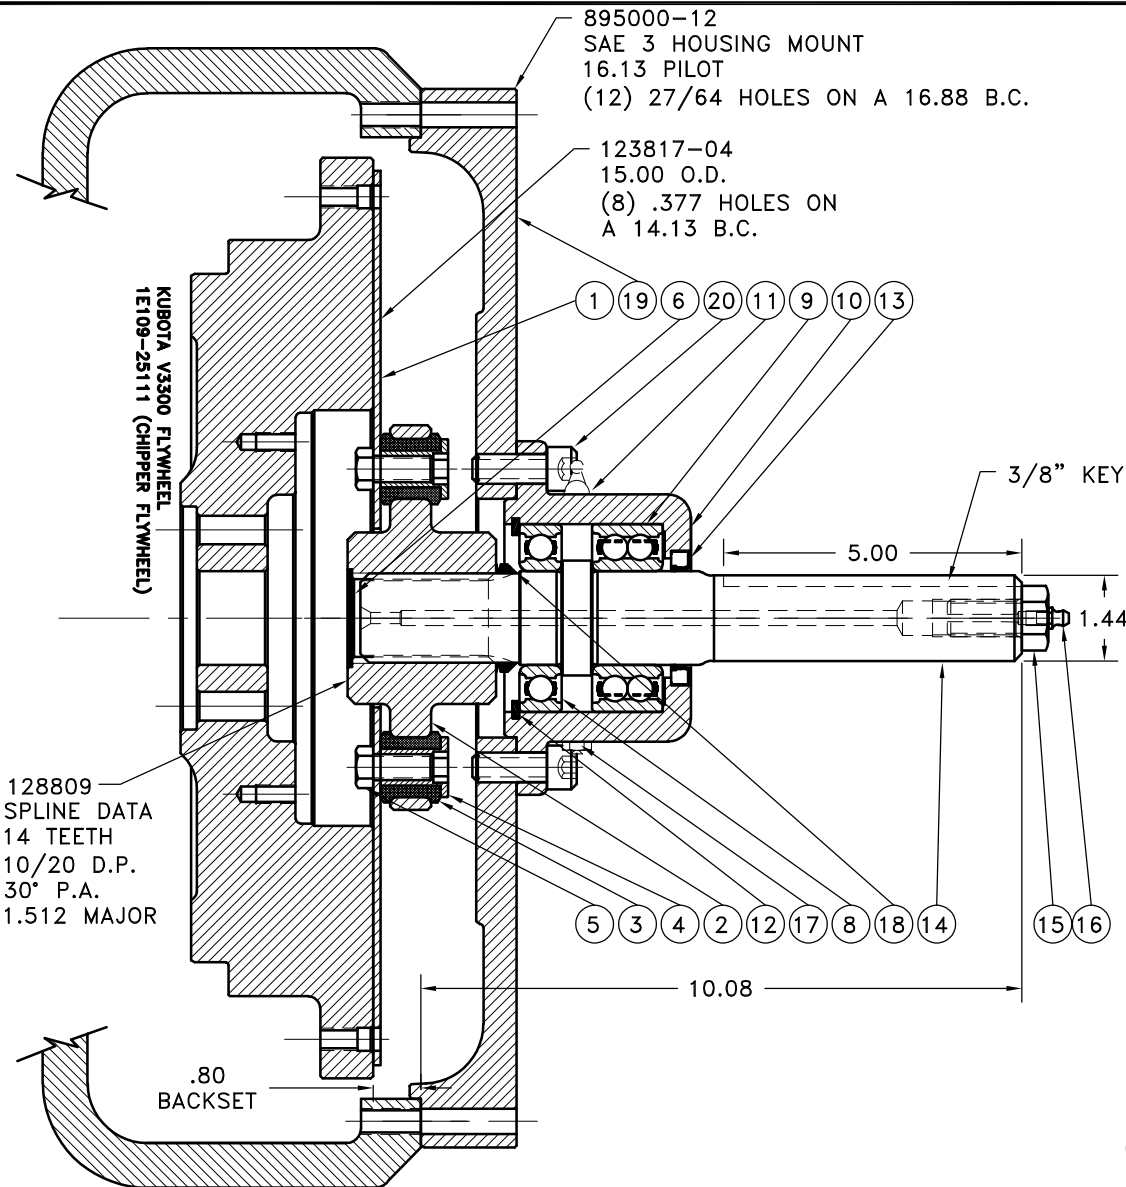

#### NOTES:

1. LIGHTLY GREASE INTERNAL AND EXTERNAL AREA OF SPLINE AT ASSEMBLY USING SUPPLIED COUPLING GREASE (OVER GREASING COULD CAUSE A HYDRAULIC TYPE LIFT ON SEALS).
2. **AT ASSEMBLY GREASE BEARING HOUSING UNTIL PIN EXTENDS FROM PRESSURE RELIEF VALVE (LOCATED 180° FROM GREASE ZERK).** USE OF AN UNLEADED EXTREME PRESSURE LITHIUM GREASE, WITH NLGI NO.2 GRADE IS RECOMMENDED. RUN TIME BETWEEN GREASINGS NOT TO EXCEED 2,000 HOURS.
3. **WARNING!!!** INJURY OR DEATH FROM A ROTATING STUB SHAFT CAN OCCUR IF A CONDITION EXISTS WHICH WOULD CAUSE THE SHAFT TO BREAK OR COME APART FROM ANY PART OF THE ASSEMBLY. DEPENDING UPON THE APPLICATION (FOR EXAMPLE, FAN, PULLEY, SHEAVE, ETC.), THE AREA AROUND THE STUB SHAFT MUST BE SUFFICIENTLY GUARDED SO THAT IN THE EVENT OF FAILURE, THE GUARD WILL CONTAIN ANY AIRBORNE PARTS.

21	895030	BOLT KIT (PRE-ASSEMBLED)	1
20	BOLT	1/2-13x1-1/8 SHCS D	4
19	895000-12	SAE 3 HOUSING	1
18	400401	V-RING	1
17	1093K11	RELIEF VALVE	1
16	609000	GREASE ZERK	1
15	125294	SPECIAL 5/8-11 HHB	1
14	125721	SPLINED SHAFT	1
13	132015	SEAL	1
12	RR-314	SNAP RING	1
11	600000	GREASE ZERK	1
10	125007	BEARING HOUSING	1
9	5208WD	DOUBLE BEARING	1
8	208KD	BEARING	1
7	801912	GREASE	1
6	R-0017-02	GREASE PLUG	1
5	BOLT	7/16-20x1 HHB Y D	10
4	123727	THREADED BUSHING	10
3	H62500	NEOPRENE INSERT	10
2	128809	COUPLING HUB	1
1	123817-04	FLYWHEEL PLATE	1

SUB ASS'Y #125722  
COUPLING ASS'Y #128785

KUBOTA V3300 SHORT HOUSING  
1G517-46012 SAE #3

#### ASSEMBLY NOTE:

ENSURE THAT THE GREASE ZERK  
AND RELIEF VALVE ARE LOCATED  
HORIZONTAL WHEN MOUNTING ON  
TO PUMP MOUNT PLATE.

THIS DRAWING IS THE PROPERTY OF HAYES MFG. INC. AND IS LOANED SUBJECT TO THE CONDITION THAT IT SHALL NOT BE REPRODUCED, COPIED, LOANED OR OTHERWISE DISPOSED OF, DIRECTLY OR INDIRECTLY. IT SHALL BE USED AS A MEANS OF REFERENCE TO WORK FURNISHED BY THIS COMPANY ONLY AND IS NOT TO BE SUBMITTED TO OUTSIDE PARTIES FOR EXAMINATION WITHOUT OUR CONSENT.

SYMBOLS	DET.	PART NUMBER	DESCRIPTION	QTY.
FLATNESS STRAIGHTNESS ANGULARITY PERPENDICULARITY PARALLELISM CONCENTRICITY TRUE POSITION ROUNDNESS CIRCULAR RUN OUT TOTAL RUN OUT CYLINDRICITY FINISH	DO NOT SCALE DRAWING TOLERANCES UNLESS OTHERWISE SPECIFIED .125" MAXIMUM ANGLE ±1/2° FRACTION ±1/32 DECIMAL .00 ±.01 .000 ±.005 .0000 ±.0005		<b>HAYES</b> MANUFACTURING INC. ® TITLE KUBOTA V3300 SAE 3 STUB SHAFT MATERIAL	
CLASS BS ASSY DESCRIPTION KBV3300,14T10/20,1-7/16,5	MAKE: <input checked="" type="checkbox"/> BUY: <input type="checkbox"/>	DRAWN BY KNH CHECKED BY RJH	DATE 06/04/2014 SCALE	DRAWING NO. 895067 SHEET OF REV.