

**YANMAR HOUSING
171301-01600
SEMI- SAE #5**

M10x1.5 HHB
TORQUE 29-33 FT.LBS

M8 x 1.25 HHB
TORQUE 20-25 FT.LBS.

123243-09
9.499 O.D.
(8) .343 HOLES
ON 8.750 B.C.

**PUMP
OR
MOTOR**

1.81 SHAFT
LENGTH

123207-15
SPLINE DATA
15 TEETH
16/32 D.P.
30° P.A.
1.016 MAJOR
SAE "B-B"


YANMAR FLYWHEEL
SAE #7-1/2
119265-21590

.590 [14.99mm]
1 5/8 [41mm]
3.150 [80.01mm]

**YANMAR ENGINES
3TNE68VH & 3TNE74VM**

THIS DRAWING IS THE PROPERTY OF HAYES MFG. INC. AND IS LOANED SUBJECT TO THE CONDITION THAT IT SHALL NOT BE REPRODUCED, COPIED, LOANED OR OTHERWISE DISPOSED OF, DIRECTLY OR INDIRECTLY. IT SHALL BE USED AS A MEANS OF REFERENCE TO WORK FURNISHED BY THIS COMPANY ONLY AND IS NOT TO BE SUBMITTED TO OUTSIDE PARTIES FOR EXAMINATION WITHOUT OUR CONSENT.

REV	DATE	CHANGE DESCRIPTION	MOD.BY	CK1	CK2
E	07/31/2001	UPDATED M8 TORQUE VALUES	MAYCROFT	HM	RJH

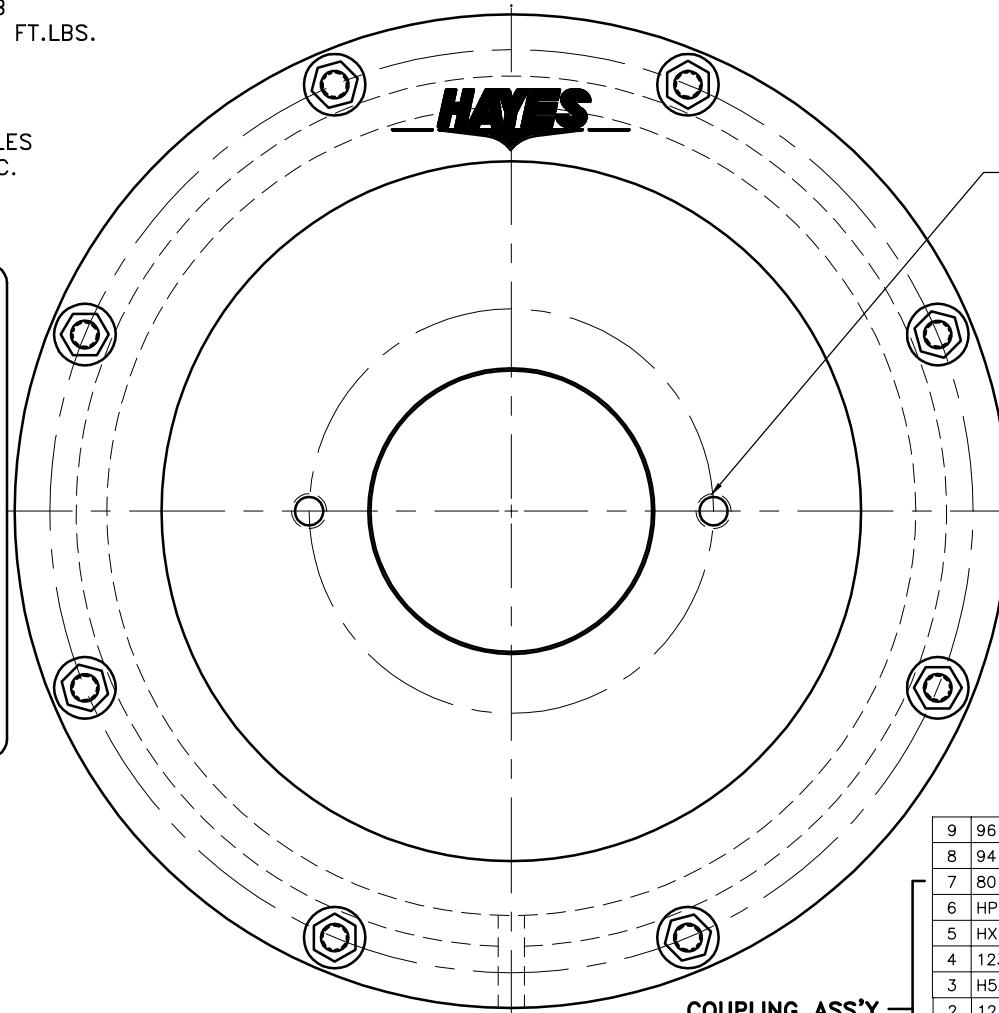

SAE "B" 2-BOLT MOUNT
4.00 DIA PUMP PILOT
(2) 1/2-13 TAPPED HOLES
EQ. SPACED ON 5.75 B.C.

UP TO 20 HP

**COUPLING ASS'Y
#123272-15**

REV	DATE	CHANGE DESCRIPTION	MOD.BY	CK1	CK2
9	961457	BOLT KIT			1
8	941905-02	HOUSING [5]			1
7	801912	GREASE			1
6	HP-1125-S-32	HUBBARD PLUG			1
5	HX100	5/16-24x5/8 H.H.B.			3
4	123729-01	THREADED BUSHING			3
3	H52500	NEOPRENE INSERT			3
2	123207-15	COUPLING HUB [15 16/32\3.000]			1
1	123243-09	FLYWHEEL PLATE [7.5\3.000]			1

SYMBOLS	DET.	PART NUMBER	DESCRIPTION	QTY.
<ul style="list-style-type: none"> FLATNESS STRAIGHTNESS ANGULARITY SQUARENESS PARALLELISM CONCENTRICITY TRUE POSITION ROUNDNESS CIRCULAR RUN OUT TOTAL RUN OUT CYLINDRICITY FINISH 	DO NOT SCALE DRAWING TOLERANCES UNLESS OTHERWISE SPECIFIED 125 MAXIMUM ANGLE ±1/2° FRACTION ±1/32 DECIMAL .00 ±.01 .000 ±.005 .0000 ±.0005			
- UNLESS OTHERWISE SPECIFIED - REMOVE FIRST THREAD ON ALL TAPPED HOLES BREAK ALL SHARP CORNERS .010 TO .020 STAMP OR MARK DRAWING NO.		DRAWN BY HAYEMAN CHECKED BY RJH	DATE 9-30-98 SCALE	DRAWING NO. 941892 SHEET OF REV.