REV	DATE	CHANGE DESCRIPTION	MOD.BY	CK1	CK2
A3	05/09/2005	REMOVED 1912 FROM NOTES.	ZS	RJH	HM

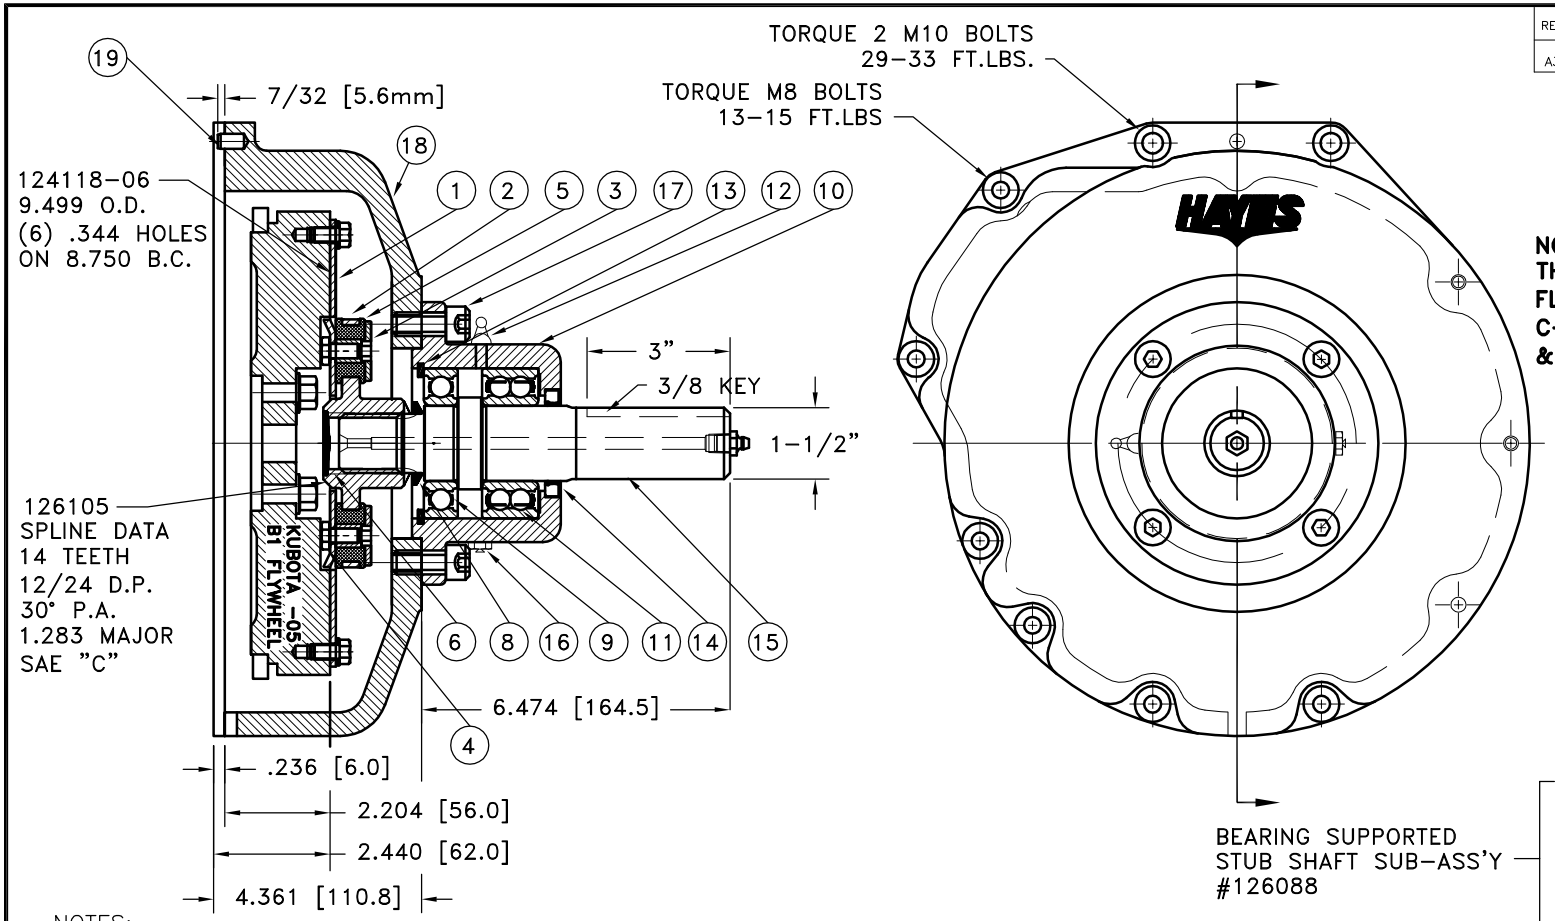

NOTE:
THIS ASSEMBLY WORKS WITH:
FLYWHEELS C–9(16614–25112)
C–8(16692–25113)
& STARTER PLATE E–1(16241–04621)

ASSEMBLY NOTE:

ENSURE THAT THE GREASE ZERT AND RELIEF VALVE ARE LOCATED HORIZONTAL WHEN MOUNTING ON TO PUMP MOUNT PLATE.

BEARING SUPPORTED
STUB SHAFT SUB–ASS'Y
#126088

COUPLING ASS'Y
125747

DET.	PART NUMBER	DESCRIPTION	QTY.
20	952111	BOLT KIT (PRE–ASSEMBLED)	1
19	DOWEL	SD200x5/16x1/2 DOWEL PIN	2
18	952066–01	HOUSING	1
17	BOLT	1/2–13x1–1/8 SHCS D	4
16	1093K11	RELIEF VALVE	1
15	126087	SPLINED SHAFT	1
14	15830	SEAL	1
13	RR–314	SPIROLOX SNAP RING	1
12	600000	GREASE ZERT	2
11	5208WD	DOUBLE BEARING	1
10	125007	BEARING HOUSING	1
9	208P	BEARING	1
8	VS–032	V–RING	1
7	801912	GREASE	1
6	R–0017–01	GREASE PLUG	1
5	H52500	NEOPRENE INSERT	8
4	HX300	SPEC 5/16–24x5/8 HHB Y D	8
3	123729–01	THREADED BUSHING	8
2	126105	COUPLING HUB	1
1	124118–06	FLYWHEEL PLATE	1

NOTES:

1. LIGHTLY GREASE INTERNAL AND EXTERNAL AREA OF SPLINE AT ASSEMBLY USING SUPPLIED COUPLING GREASE (OVER GREASING COULD CAUSE A HYDRAULIC TYPE LIFT ON SEALS).

2. GREASE BEARING HOUSING UNTIL PIN EXTENDS FROM PRESSURE RELIEF VALVE (LOCATED 180° FROM GREASE ZERT). USE OF AN UNLEADED EXTREME PRESSURE LITHIUM GREASE, WITH NLGI NO.2 GRADE IS RECOMMENDED. RUN TIME BETWEEN GREASINGS NOT TO EXCEED 2,000 HOURS.

3. WARNING!!! INJURY OR DEATH FROM A ROTATING STUB SHAFT CAN OCCUR IF A CONDITION EXISTS WHICH WOULD CAUSE THE SHAFT TO BREAK OR COME APART FROM ANY PART OF THE ASSEMBLY. DEPENDING UPON THE APPLICATION (FOR EXAMPLE, FAN, PULLEY, SHEAVE, ETC.), THE AREA AROUND THE STUB SHAFT MUST BE SUFFICIENTLY GUARDED SO THAT IN THE EVENT OF FAILURE, THE GUARD WILL CONTAIN ANY AIRBORNE PARTS.

4. HOUSING FOR KUBOTA ENGINES D–905, D1005–B, D1105–B, V1205–B, V1305–B AND V1505–B

THIS DRAWING IS THE PROPERTY OF HAYES MFG. INC. AND IS LOANED SUBJECT TO THE CONDITION THAT IT SHALL NOT BE REPRODUCED, COPIED, LOANED OR OTHERWISE DISPOSED OF, DIRECTLY OR INDIRECTLY. IT SHALL BE USED AS A MEANS OF REFERENCE TO WORK FURNISHED BY THIS COMPANY ONLY AND IS NOT TO BE SUBMITTED TO OUTSIDE PARTIES FOR EXAMINATION WITHOUT OUR CONSENT.

SYMBOLS: FLATNESS, STRAIGHTNESS, ANGULARITY, PERPENDICULARITY, PARALLELISM, CONCENTRICITY, TRUE POSITION, ROUNDNESS, CIRCULAR RUN OUT, TOTAL RUN OUT, CYLINDRICITY, FINISH

DO NOT SCALE DRAWING
TOLERANCES UNLESS OTHERWISE SPECIFIED
125 MAXIMUM
ANGLE ±1/2°
FRACTION ±1/32
DECIMAL
.00 ±.01
.000 ±.005
.0000 ±.0005

HAYES MANUFACTURING INC. ®

TITLE: KUBOTA -05 BEARING SUPPORTED STUB SHAFT ASS'Y

MATERIAL

CLASS

MAKE: ☐ BUY: ☐

DESCRIPTION

DRAWN BY: LAWSON
DATE: 1–24–02
CHECKED BY: RJH
SCALE

DRAWING NO. 952144
SHEET OF REV.

COPYRIGHT ©2000–2014 by Hayes Manufacturing, Inc. All rights reserved.

4/16/2014 10:07:05 AM