


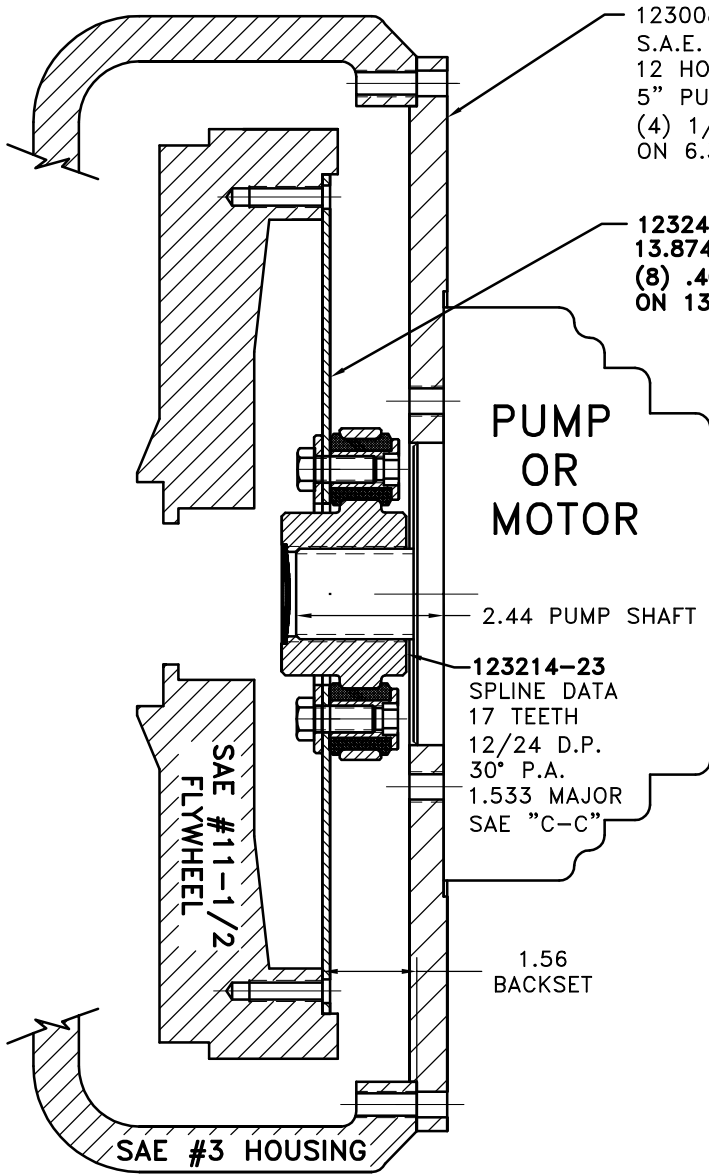

123008-DX4
S.A.E. HOUSING MOUNT 27/64 DIA DRILL THRU
12 HOLES EQUALLY SPACED ON 16.88 B.C.
5" PUMP PILOT S.A.E. "C" PUMP MOUNT
(4) 1/2-13 TAPPED HOLES EQUALLY SPACED
ON 6.38 B.C.

123243-30
13.874 O.D.
(8) .406 HOLES
ON 13.125 B.C.


PUMP
OR
MOTOR

2.44 PUMP SHAFT

123214-23
SPLINE DATA
17 TEETH
12/24 D.P.
30° P.A.
1.533 MAJOR
SAE "C-C"

1.56
BACKSET

SAE #3 HOUSING

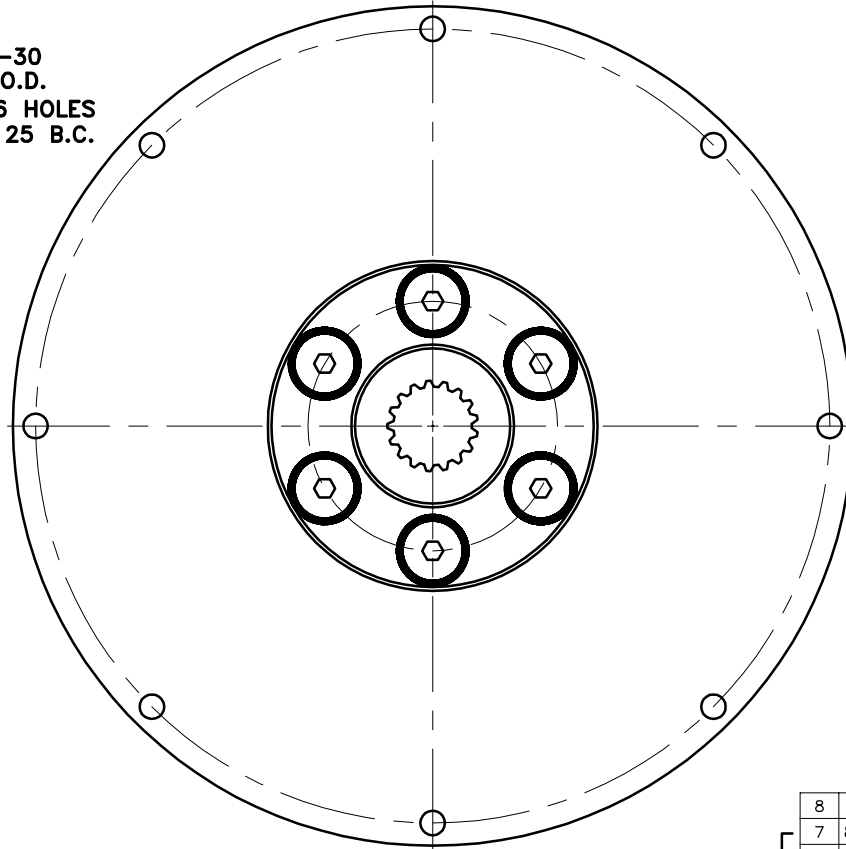

SYM.	DATE	CHANGE DESCRIPTION	DWN.
A	12/01	CHANGED 123008-DQ4 TO DX4	RH
B	01/01	CHANGED TO BOLTED	RH
C	01/01	ADDED BACKING PLATE	RH

UP TO 110 HP

8	123008-DX4	PUMP MOUNT PLATE	1
7	801912	GREASE	1
6	HP-1625-S-62	HUBBARD PLUG	1
5	HX200	7/16-20x1 HHB	6
4	123727	THREADED BUSHING	6
3	123214-23	COUPLING HUB	1
2	124623	BACKING PLATE	1
1	123243-30	FLYWHEEL PLATE	1

COUPLING ASS'Y
#125416

SYMBOLS	DET.	PART NUMBER	DESCRIPTION	QTY.
FLATNESS STRAIGHTNESS ANGULARITY SQUARENESS PARALLELISM CONCENTRICITY TRUE POSITION ROUNDNESS CIRCULAR RUN OUT TOTAL RUN OUT CYLINDRICITY FINISH	DO NOT SCALE DRAWING TOLERANCES UNLESS OTHERWISE SPECIFIED ANGLE $\pm 1/2^\circ$ FRACTION $\pm 1/32$ DECIMAL .00 $\pm$.01 .000 $\pm$.005 .0000 $\pm$.0005	TITLE FLYWHEEL COUPLING ASS'Y WITH PUMP MOUNT PLATE MATERIAL		
- UNLESS OTHERWISE SPECIFIED - REMOVE FIRST THREAD ON ALL TAPPED HOLES BREAK ALL SHARP CORNERS .010 TO .020 STAMP OR MARK DRAWING NO.	DRAWN BY HAVEMAN CHECKED BY	DATE 4-26-99 SCALE	DRAWING NO. 125415 SHEET OF REV.	

THIS DRAWING IS THE PROPERTY OF HAYES MFG. INC. AND IS LOANED
SUBJECT TO THE CONDITION THAT IT SHALL NOT BE REPRODUCED,
COPIED, LOANED OR OTHERWISE DISPOSED OF, DIRECTLY OR INDIRECTLY.
IT SHALL BE USED AS A MEANS OF REFERENCE TO WORK FURNISHED BY
THIS COMPANY ONLY AND IS NOT TO BE SUBMITTED TO OUTSIDE PARTIES
FOR EXAMINATION WITHOUT OUR CONSENT.