



| REV | DATE | CHANGE DESCRIPTION | MOD. BY | CK1 | CK2 |
|-----|------------|--------------------|---------|-----|-----|
| D | 09/01/2000 | CHANGED TO BOLTED | HAVEMAN | | |

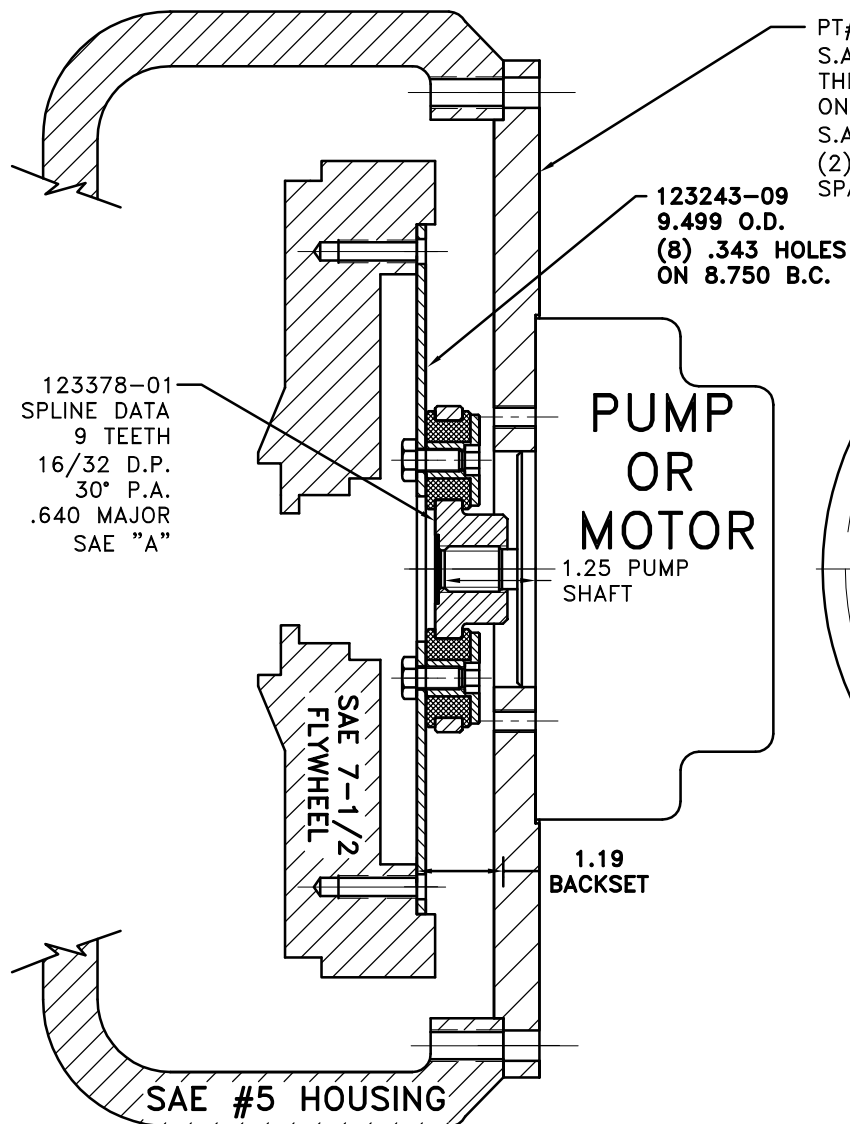

PT# 123008-GN2
S.A.E HOUSING MOUNT 27/64 DRILL
THRU 8 HOLES EQUALLY SPACED
ON 13.13 B.C. 3.25 PUMP PILOT
S.A.E "A" PUMP MOUNT.
(2) 3/8-16 TAPPED HOLES EQUALLY
SPACED ON 4.18 B.C.

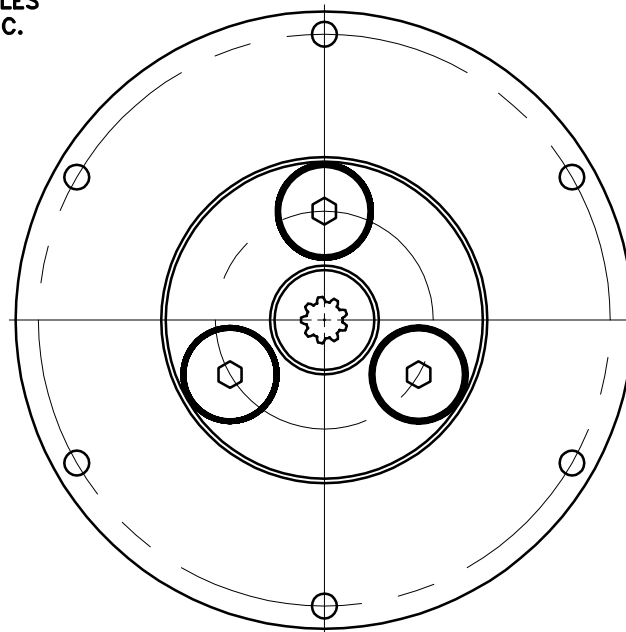

UP TO 20 HP

COUPLING ASS'Y
#123350

| | | | |
|---|-------------|--------------------|---|
| 8 | 123008-GN2 | PUMP MOUNT PLATE | 1 |
| 7 | 801912 | GREASE | 1 |
| 6 | HP-937-S-32 | HUBBARD PLUG | 1 |
| 5 | HX100 | 5/16-24x5/8 H.H.B. | 3 |
| 4 | 123729-01 | THREADED BUSHING | 3 |
| 3 | H52500 | NEOPRENE INSERT | 3 |
| 2 | 123378-01 | COUPLING HUB | 1 |
| 1 | 123243-09 | FLYWHEEL PLATE | 1 |

| SYMBOLS | DET. | PART NUMBER | DESCRIPTION | QTY. |
|---|--|--------------------------|--|------|
| FLATNESS STRAIGHTNESS ANGULARITY SQUARENESS PARALLELISM CONCENTRICITY TRUE POSITION ROUNDNESS CIRCULAR RUN OUT TOTAL RUN OUT CYLINDRICITY FINISH | DO NOT SCALE DRAWING TOLERANCES UNLESS OTHERWISE SPECIFIED 125 MAXIMUM ANGLE ±1/2° FRACTION ±1/32 DECIMAL .00 ±.01 .000 ±.005 .0000 ±.0005 | | HAYES MANUFACTURING INC. ® TITLE FLYWHEEL COUPLING ASS'Y MATERIAL | |
| - UNLESS OTHERWISE SPECIFIED - REMOVE FIRST THREAD ON ALL TAPPED HOLES BREAK ALL SHARP CORNERS .010 TO .020 STAMP OR MARK DRAWING NO. | DRAWN BY HAVEMAN CHECKED BY RJH | DATE 7-24-90 SCALE | DRAWING NO. 123534 SHEET OF REV. | |

THIS DRAWING IS THE PROPERTY OF HAYES MFG. INC. AND IS LOANED
SUBJECT TO THE CONDITION THAT IT SHALL NOT BE REPRODUCED,
COPIED, LOANED OR OTHERWISE DISPOSED OF, DIRECTLY OR INDIRECTLY.
IT SHALL BE USED AS A MEANS OF REFERENCE TO WORK FURNISHED BY
THIS COMPANY ONLY AND IS NOT TO BE SUBMITTED TO OUTSIDE PARTIES
FOR EXAMINATION WITHOUT OUR CONSENT.