

REV	DATE	CHANGE DESCRIPTION	MOD.BY	CK1	CK2
F	11/22/2004	CHANGED TO BOLTED.	ZS	RJH	HM

PT# 123401-4A
 SAE HOUSING MOUNT
 (12) 27/64 HOLES EQUALLY SPACED
 ON 15.00" B.C. 6.30"
 PUMP PILOT SAE "SPECIAL" PUMP MOUNT.
 (2) 5/8-11 TAPPED HOLES EQUALLY
 SPACED ON 8.819" B.C. FOR PUMP MOUNT.

123243-13
 10.375 O.D.
 (6) .406 HOLES
 ON 9.625 B.C.


123713-24
 SPLINE DATA:
 21 TEETH
 W45x2x30x21x9H
 DIN 5480
 1.790 MAJOR

PUMP
 OR
 MOTOR

1.96 SHAFT
 LENGTH

2.16
 2.44
 BACKSET

SAE #4 HOUSING

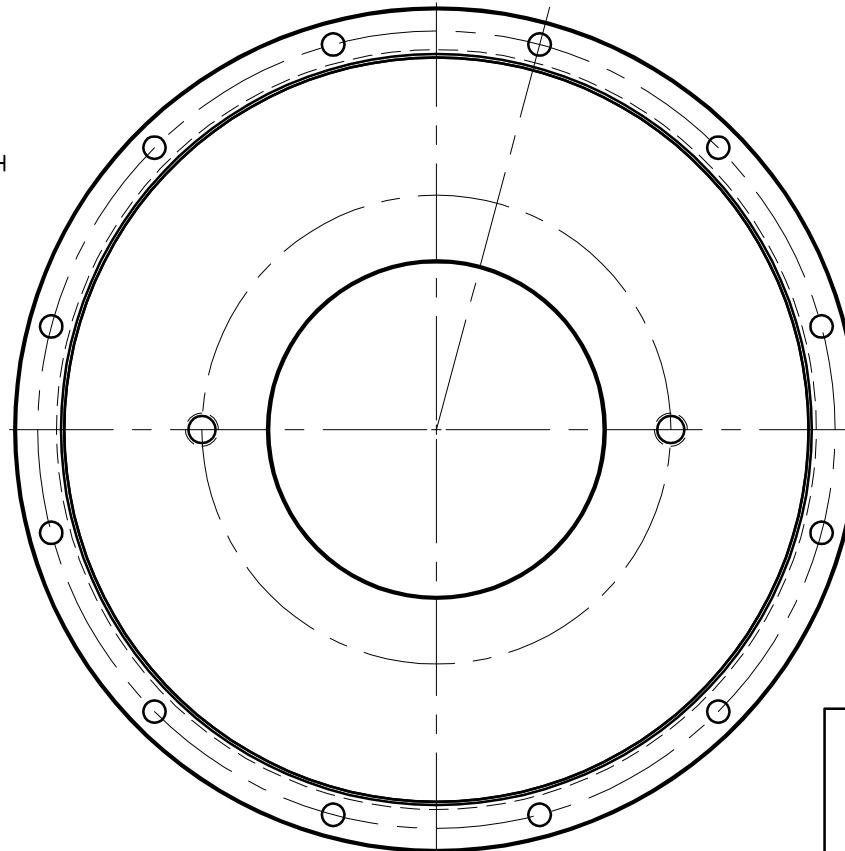

COUPLING ASS'Y #123063

UP TO 150 HP.

10	123401-4A	PUMP MOUNT PLATE [4]	1
9	801912	GREASE	1
8	HP-2000-S-62	HUBBARD PLUG	1
7	N250	7/16-20 NUT	8
6	HX230	7/16-20 x 1 3/4" HHB	8
5	123000-00	STEEL BUSHING	8
4	H62500	NEOPRENE INSERT	8
3	123713-24	COUP HUB [W45x2x30x21x9H\5.000]	1
2	124657-02	BACKING PLATE	1
1	123243-13	FLYWHEEL PLATE [8\5.000]	1

SYMBOLS	DET.	PART NUMBER	DESCRIPTION	QTY.
FLATNESS STRAIGHTNESS ANGULARITY SQUARENESS PARALLELISM CONCENTRICITY TRUE POSITION ROUNDNESS CIRCULAR RUN OUT TOTAL RUN OUT CYLINDRICITY FINISH	DO NOT SCALE DRAWING TOLERANCES UNLESS OTHERWISE SPECIFIED MAXIMUM ANGLE $\pm 1/2^\circ$ FRACTION $\pm 1/32$ DECIMAL .00 $\pm .01$.000 $\pm .005$.0000 $\pm .0005$		 TITLE FLYWHEEL COUPLING ASSY WITH PUMP MOUNT PLATE MATERIAL	
- UNLESS OTHERWISE SPECIFIED - REMOVE FIRST THREAD ON ALL TAPPED HOLES BREAK ALL SHARP CORNERS .010 TO .020 STAMP OR MARK DRAWING NO.		DRAWN BY SIETING CHECKED BY RJH	DATE 09-10-91 SCALE	DRAWING NO. 123741 SHEET OF REV.

THIS DRAWING IS THE PROPERTY OF HAYES MFG. INC. AND IS LOANED
 SUBJECT TO THE CONDITION THAT IT SHALL NOT BE REPRODUCED,
 COPIED, LOANED OR OTHERWISE DISPOSED OF, DIRECTLY OR INDIRECTLY.
 IT SHALL BE USED AS A MEANS OF REFERENCE TO WORK FURNISHED BY
 THIS COMPANY ONLY AND IS NOT TO BE SUBMITTED TO OUTSIDE PARTIES
 FOR EXAMINATION WITHOUT OUR CONSENT.