



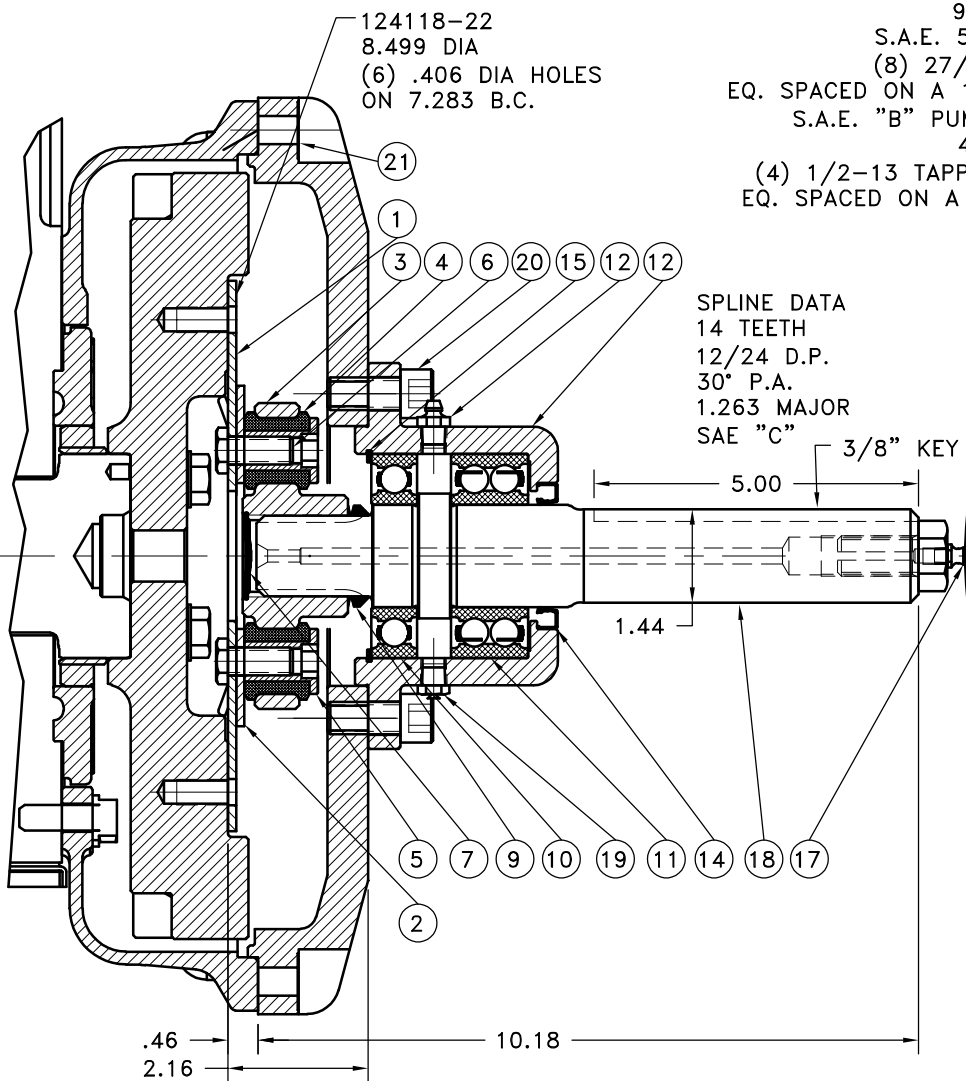

901700-05
S.A.E. 5 HOUSING
(8) 27/64 HOLES
EQ. SPACED ON A 13.13 B.C.
S.A.E. "B" PUMP MOUNT
4.00 PILOT
(4) 1/2-13 TAPPED HOLES
EQ. SPACED ON A 5.00 B.C.

SPLINE DATA
14 TEETH
12/24 D.P.
30° P.A.
1.263 MAJOR
SAE "C"
3/8" KEY

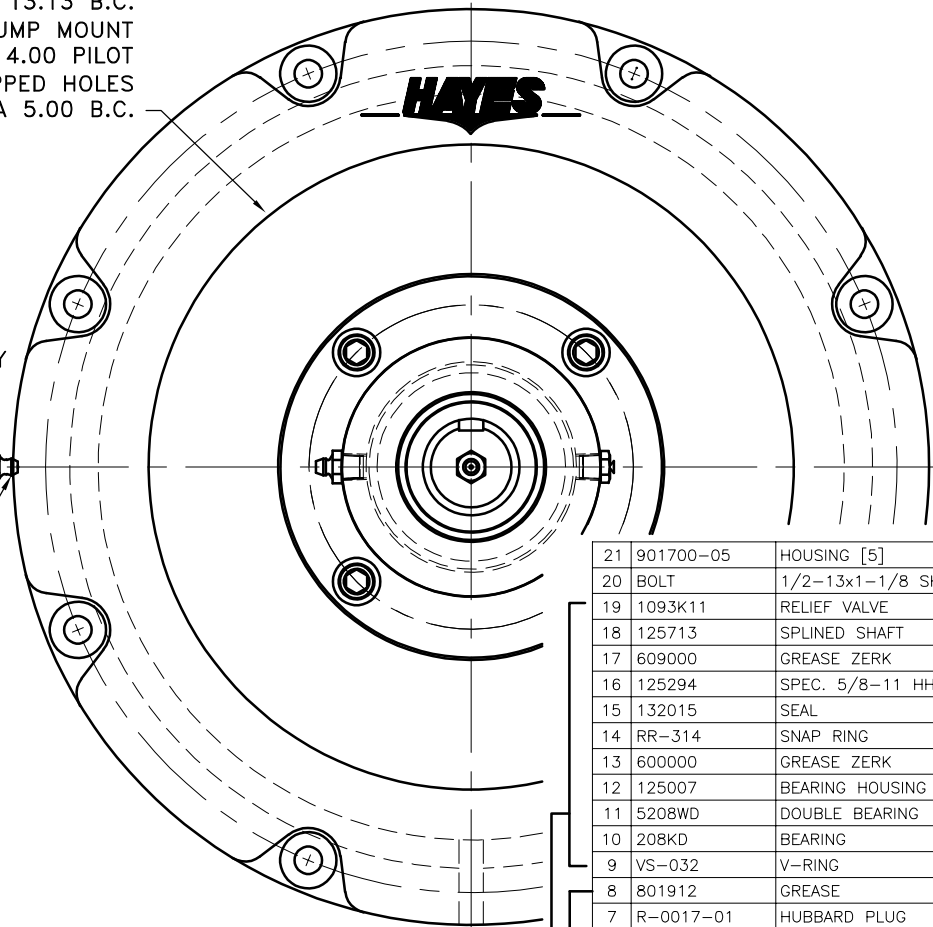

SUB-ASS'Y #125714
COUPLING ASSY #128803

REV	DATE	CHANGE DESCRIPTION	MOD. BY	CK1	CK2
B	06/09/2016	CHANGED SEAL	BSL	HM	JM

21	901700-05	HOUSING [5]	1
20	BOLT	1/2-13x1-1/8 SHCS D	4
19	1093K11	RELIEF VALVE	1
18	125713	SPLINED SHAFT	1
17	609000	GREASE ZERK	1
16	125294	SPEC. 5/8-11 HHB	1
15	132015	SEAL	1
14	RR-314	SNAP RING	1
13	600000	GREASE ZERK	2
12	125007	BEARING HOUSING	1
11	5208WD	DOUBLE BEARING	1
10	208KD	BEARING	1
9	VS-032	V-RING	1
8	801912	GREASE	1
7	R-0017-01	HUBBARD PLUG	1
6	HX210	SPEC. 7/16-20x1 HHB Y D	6
5	123727	THREADED BUSHING	6
4	H62500	NEOPRENE INSERT	6
3	124106-01	COUPLING HUB	1
2	128142	BACKING PLATE	1
1	124118-22	FLYWHEEL PLATE	1

FITS KUBOTA 2403-M & D1803M
FITS FLYWHEEL #1G850-25013
AND HOUSING #1G850-04613 OR
SIMILAR PARTS.

THIS DRAWING IS THE PROPERTY OF HAYES MFG. INC. AND IS LOANED
SUBJECT TO THE CONDITION THAT IT SHALL NOT BE REPRODUCED,
COPIED, LOANED OR OTHERWISE DISPOSED OF, DIRECTLY OR INDIRECTLY.
IT SHALL BE USED AS A MEANS OF REFERENCE TO WORK FURNISHED BY
THIS COMPANY ONLY AND IS NOT TO BE SUBMITTED TO OUTSIDE PARTIES
FOR EXAMINATION WITHOUT OUR CONSENT.

SYMBOLS	DET.	PART NUMBER	DESCRIPTION	QTY.
FLATNESS STRAIGHTNESS ANGULARITY PERPENDICULARITY PARALLELISM CONCENTRICITY TRUE POSITION ROUNDNESS CIRCULAR RUN OUT TOTAL RUN OUT CYLINDRICITY FINISH	DO NOT SCALE DRAWING TOLERANCES UNLESS OTHERWISE SPECIFIED 125/ MAXIMUM ANGLE ±1/2° FRACTION ±1/32 DECIMAL .00 ±.01 .000 ±.005 .0000 ±.0005	MAKE: ☒ BUY: ☐	HAYES MANUFACTURING INC. ® TITLE FLYWHEEL COUPLING ASSY WITH PUMP MOUNT PLATE MATERIAL	
CLASS BS ASSY DESCRIPTION KB2403,1.44,5.00,B4	DRAWN BY SIETING CHECKED BY RJH	DATE 06-09-2011 SCALE	DRAWING NO. 901711 SHEET OF REV.	