
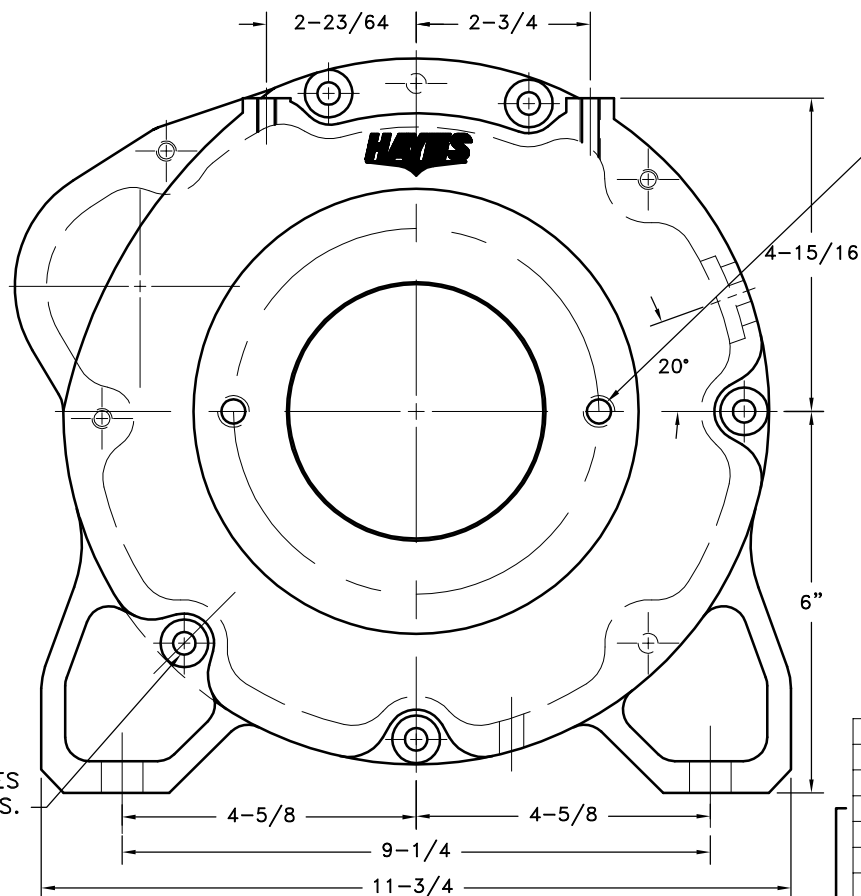


REV	DATE	CHANGE DESCRIPTION	MOD. BY	CK1	CK2

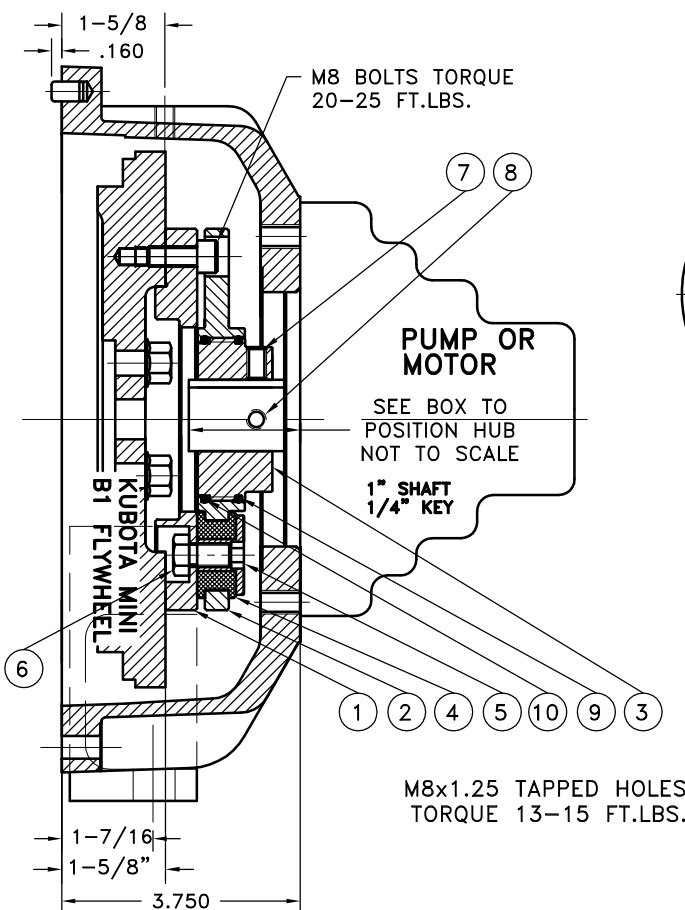

SAE "B"-BOLT MOUNT
4.00 PUMP PILOT
(2) 1/2-13 TAPPED HOLES
EQ. SPACED ON 5.750 B.C.


ASS'Y WORKS WITH
FLYWHEELS: C-1(16851-25118)
& C-2(16861-25112)
STARTER PLATE: E-2(19666-04621)

14	930112	BOLT KIT	1
13	PURCHASE	5/16 DIA x 1/2" DOWEL PIN	2
12	930114-02	HOUSING	1
11	801912	GREASE	1
10	568-143	O-RING(124283)	1
9	568-142	O-RING(124284-05)	1
8	PURCHASE	5/16-18x3/4 S.S.S.C.P.	1
7	PURCHASE	5/16-18x5/8 S.S.S.C.P.	1
6	HX100	5/16-24x5/8 HHB	5
5	123729-01	THREADED BUSHING	5
4	H52500	NEOPRENE INSERT	5
3	124284-11	ADAPTER HUB	1
2	124283	ADAPTER PLATE	1
1	124280	FLYWHEEL PLATE	1

NOTES:

1. HOUSING FOR KUBOTA ENGINES Z442-B, Z482-B, D662-B, D722-B, WG600-B, WG750-B
2. USE FURNISHED TEXACO 1912 COUPLING GREASE ON BOTH MALE AND FEMALE SPLINE.

NOTE: REMOVE HUB FROM ASS'Y,
PRESET HUB ON SHAFT & RE-
ASSEMBLE USING NUT & BOLT
GRADE LOC-TITE ON SET SCREWS
IF SHAFT LENGTH IS NOT SHOWN
USE THIS EQUATION TO GET NEW
HUB PRE-SET:
1.609-SHAFT LENGTH=HUB PRE-SET

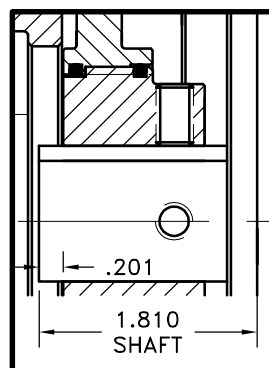

COUPLING ASS'Y
#127358

SYMBOLS	DET.	PART NUMBER	DESCRIPTION	QTY.
DO NOT SCALE DRAWING STRAIGHTNESS ANGULARITY SQUARENESS PARALLELISM CONCENTRICITY TRUE POSITION ROUNDNESS CIRCULAR RUN OUT TOTAL RUN OUT CYLINDRICITY FINISH	TOLERANCES UNLESS OTHERWISE SPECIFIED 125° MAXIMUM ANGLE ±1/2° FRACTION ±1/32 DECIMAL .00 ±.01 .000 ±.005 .0000 ±.0005	TITLE KUBOTA MINI SERIES FLYWHEEL COUPLING ASS'Y MATERIAL	DRAWN BY CHECKED BY SCALE	DATE DRAWING NO. 980114 SHEET OF REV.

THIS DRAWING IS THE PROPERTY OF HAYES MFG. INC. AND IS LOANED
SUBJECT TO THE CONDITION THAT IT SHALL NOT BE REPRODUCED,
COPIED, LOANED OR OTHERWISE DISPOSED OF, DIRECTLY OR INDIRECTLY.
IT SHALL BE USED AS A MEANS OF REFERENCE TO WORK FURNISHED BY
THIS COMPANY ONLY AND IS NOT TO BE SUBMITTED TO OUTSIDE PARTIES
FOR EXAMINATION WITHOUT OUR CONSENT.